

# We are IntechOpen, the world's leading publisher of Open Access books Built by scientists, for scientists

4,800

Open access books available

122,000

International authors and editors

135M

Downloads

Our authors are among the

154

Countries delivered to

TOP 1%

most cited scientists

12.2%

Contributors from top 500 universities



WEB OF SCIENCE™

Selection of our books indexed in the Book Citation Index  
in Web of Science™ Core Collection (BKCI)

Interested in publishing with us?  
Contact [book.department@intechopen.com](mailto:book.department@intechopen.com)

Numbers displayed above are based on latest data collected.  
For more information visit [www.intechopen.com](http://www.intechopen.com)



# Automation of Subjective Measurements of Logatom Intelligibility in Classrooms

Stefan Brachmanski  
Wroclaw University of Technology  
Poland

## 1. Introduction

A great number of rooms are dedicated to a voice communication between a singular speaker and a group of listeners. Those rooms could be as small as meeting room and classrooms or larger like auditoriums and theatres. There is a major demand for them to assure the highest possible speech intelligibility for all listeners in the room. Classrooms are an example of rooms where a very good speech intelligibility is required (a teacher talks to a group of students who want to understand the teacher's utterance). To determine the intelligibility degree (its maps) of rooms, it is necessary to take measurements in many points of those rooms. The number of measurement points depends on room's size and precision of created intelligibility room's maps. Despite of the crucial progress in the instrumental measurement techniques, the only reliable method subjective speech intelligibility measurement is still very time consuming, expensive, demanding high skills and specially trained group of listeners. The first part of this chapter presents the idea of speech intelligibility subjective measurements. The measurements with properly trained team are taken in described standards, conditions have to be controlled and repeated. The subsequent sections of the chapter are focusing on one of the classic subjective speech intelligibility measurement method in rooms (classrooms) and its automated version which is named as the modified intelligibility test with forced choice (MIT-FC). Finally, in the last section of the chapter, there compared results of subjective speech intelligibility measurements in rooms taken with classic and automated methods are and the relation between intelligibility taken with the forced choice method is given as well. The presented relation let us compare results taken with both methods and use relations known from earlier research carried in domain of speech intelligibility. However, the biggest advantage of the speech intelligibility measurement automation is the shortening of measurement time and the possibility of taking simultaneous measurements in several points of the room. The result of speech intelligibility is obtained just after the end of measurements, it is then possible to obtain the intelligibility map in few minutes. Of course the precision is growing with number of listeners in particular points.

Speech quality is a multi-dimensional term and a complex psycho-acoustic phenomenon within the process of human perception. Every person interprets speech quality in a

different way. The pioneering work on speech intelligibility was carried out by Fletcher at Bell Labs in the early 1940s. Fletcher and his team not only established the effects of bandwidth on intelligibility but also the degree to which each octave and  $\frac{1}{3}$ -octave band contributed.

One of the fundamental parameters for quality assessment of speech signal transmission in analogue and digital telecommunication chains as well as in rooms, sound reinforcement systems and at selection of aural devices is speech intelligibility (ANSI, 2009; Basciuk & Brachmanski, 1997; Brachmanski, 2002, 2004; Davies, 1989; International Organization for Standardization – [ISO], 1991; Majewski, 1988, 1998, 2000; Polish Standard, 1991, 1999; Sotschek 1976). Satisfactory speech intelligibility should be provided by telecommunication channels, rooms and hearing aids. It is obvious, that speech intelligibility concerns only the linguistic information (i.e. what was said) and does not take into account such features of speech, like its naturalness or the speaker voice individuality. Nevertheless, intelligibility should be and - up till now - is viewed as a basic and most important aspect of the quality of all systems which transmit, code, enhance and process the speech signals. Satisfactory speech intelligibility requires adequate audibility and clarity.

In general the evaluation of the speech quality may be done by subjective (intelligibility, quality rating) (Farina, 2001; Howard & Angus, 2009; Möller, 2010) and objective methods e.g. Articulation Index - AI (American National Standards Institute – [ANSI], 1997; French & Steinberg, 1947; Kryter, 1962), Speech Transmission Index - STI (Brachmanski, 1982, 2004, 2006, Houtgast & Steeneken, 1973; International Electrotechnical Commission [IEC], 1991; Lam & Hongisto, 2006; Steeneken & Houtgast, 1980, 2002), Perceptual Evaluation of Speech Quality - PESQ (International Telecommunication Union - Telecommunication Standardization Sector [ITU-T], 2003), Perceptual Objective Listening Quality Assessment – POLQA, (ITU-T, 2011) . Designers of devices and systems intended for speech transmission incline to usage of objective measurement methods, not always taking into consideration the application limitations and exactitude which depends on type of examined object and measure conditions. However the final verifier of quality of speech transmission devices is their user, that is to say man.

The aim of aural evaluation is quantitative evaluating and qualitative differentiation of acoustical signals reaching a listener. The process of aural evaluation can be presented as follows

$$B \rightarrow S \rightarrow R \quad (1)$$

where: B – stimulus reaching the listener, S – listener, R – listener's reaction

The reaction R is dependent on the signal S reaching the listener's receptors and on conditions in which the listener is based. Generally it can be assumed that the reaction R depends on the sum of external stimuli having the effect on the listener and internal factors having the effect on his organism. That assumption, however, doesn't take into consideration the listener's characteristic features such as cognitive abilities, rate of information processing, memory etc. The reaction can be then presented as a function

$$R = f(B,S) \quad (2)$$

Physiological and psychological process connected with a reaction to sound signal (audio) consists of sensational reaction and emotional reaction. The total listener's reaction is a sum of both types of reaction.

The sensational reaction is the effect of a physiological process which occurs during the listening. It arises when a certain stimulus overdraws sensitivity levels or aural sensation category levels. The emotional reaction is more complex and difficult in analysis because it isn't a direct result of received signal features but the listener's habits and individuality. As a conclusion it can be stated that the sensational reaction is the reflection of an acoustical picture created in a person's (listener's) mind, whereas the emotional reaction is the reflection of a person's attitude to that picture. Psychological and psychoacoustical research have proven that when provided stable in time conditions of evaluation, the differences in sensational reactions of particular listeners are substantially smaller than the differences in their emotional reactions. Therefore, one aim of objectivisation of aural evaluation is limiting the influence of emotional reaction on the final assessment result. That aim is achieved by introducing appropriately numerous assessments statistics, a proper choice and training of a listeners team and proper choice of testing material and rules of carrying listeners tests. The results analysis also has the big role in minimization the influence of the emotional reaction on the assessment result.

Among the different subjective methods that have been proposed for assessment of speech quality in rooms, the preferred are methods based on intelligibility tests or listening-only tests (ITU-T, 1996a, 1996b; ITU-R, 1997). The subjective measure results should be mostly dependent on physical parameters of the tested room and not on the structure of the tested language material. The elimination of semantic information is done by means of logatom<sup>1</sup> (i.e. pseudo-words) lists on the basis of which the logatom intelligibilities are obtained. The problem is that speech (logatom) intelligibility is not a simply parameter to measure.

## 2. The traditional method of logatom intelligibility

The measurement of logatom intelligibility consists in the transmission of logatom lists, read out by a speaker, through the tested channel (room), which are then written down by listeners and the correctness of the record is checked by a group of experts who calculate the average logatom intelligibility. It is recommended to use lists of 50 or 100 logatoms (Fig.1).

Logatom lists are based on short nonsense word of the CVC type (consonant-vowel-consonant). Sometimes only CV, but also CVVC, CVCVC-words are used. The logatoms are presented in isolation or in carrier phrase e.g. "Now, please write down the logatom you hear". Each list should be phonetically and structurally balanced (Fig.2).

---

<sup>1</sup> Logatom – (*logos* (gr) – spoken phrase, *atom* (gr) – indivisible) vocal sound, generally insignificant, usually made by the sound of a consonant or the first consonant, then by an intermediate vowel, finally by a consonant or a final consonant sound.

LOGATOM LIST 3.1				
1 - 10	11 - 20	21 - 30	31 - 40	41 - 50
dufcze	cze	teń	jo	czalmy
ajtes	wać	foli	es	ny
wesk	niacko	delak	gapysz	nij
pi	wespa	szo	tyr	dnaf
żewan	szkio	penia	geja	uzy
pracło	łare	si	lo	nio
nujec	le	weru	ju	towir
wajt	wnieśma	krwolta	dziorka	ła
be	myśro	ponta	jeskol	woszki
szonie	ri	tyn	ca	kryn om
51 - 60	61 - 70	71 - 80	81 - 90	91 - 100
chfypa	dy	pa	gruto	słynej
ca	zjaciech	piestma	ke	jentuś
czniesa	wyzo	fa	todzi	jos
szażmo	żam	żnota	ply	bep
neni	fjesztech	gzał	abe	du
se	ro	dojsto	tnązy	wo
błunki	kiet	ga	kamu	cioch
dnozger	desi	vrum	ksi	zał
bomuć	mo	iżo	wnici	ną
dzany	bejce	du	nu	sz e

Fig. 1. Illustrative 100-logatom list from set 3 for the Polish language.

The measurement should be carried out in rooms in which level of internal noise together with external noise (not introduced on purpose) does not exceed 40 dBA. If no requirements as to background noise are specified for a tested chain, articulation should be measured at a noise level of 60 dBA in the receiving room and for the Hoth spectrum (Fig. 3).

The listeners should be selected from persons who have normal, good hearing and normal experience in pronunciation in the language used in the test. A person is considered to have normal hearing if her/his threshold does not exceed 10 dB for any frequency in a band of 125 Hz –4000 Hz and 15 dB in a band of 4000 Hz– 6000 Hz. Hearing threshold should be tested by means of a diagnostic audiometer.



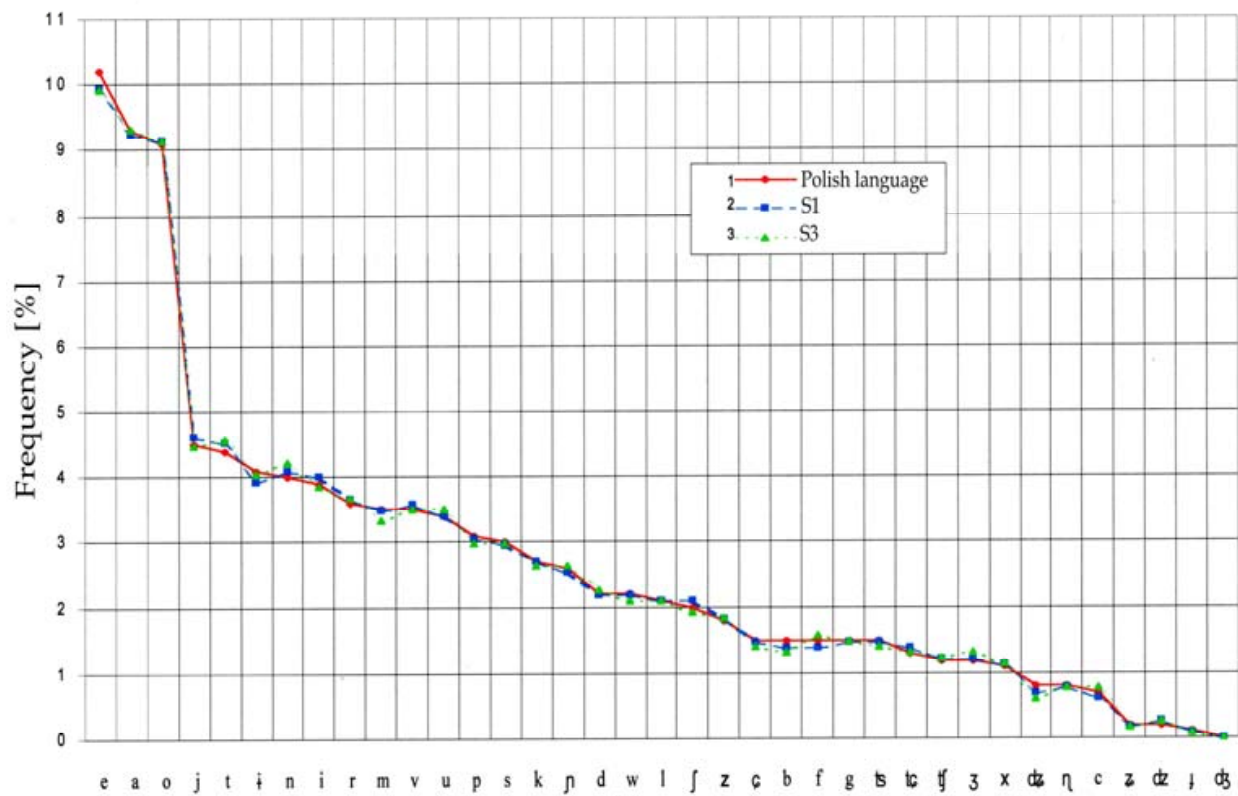


Fig. 2. Example of phonetic balance of two sets, three lists of 100 logatom each for the Polish language.

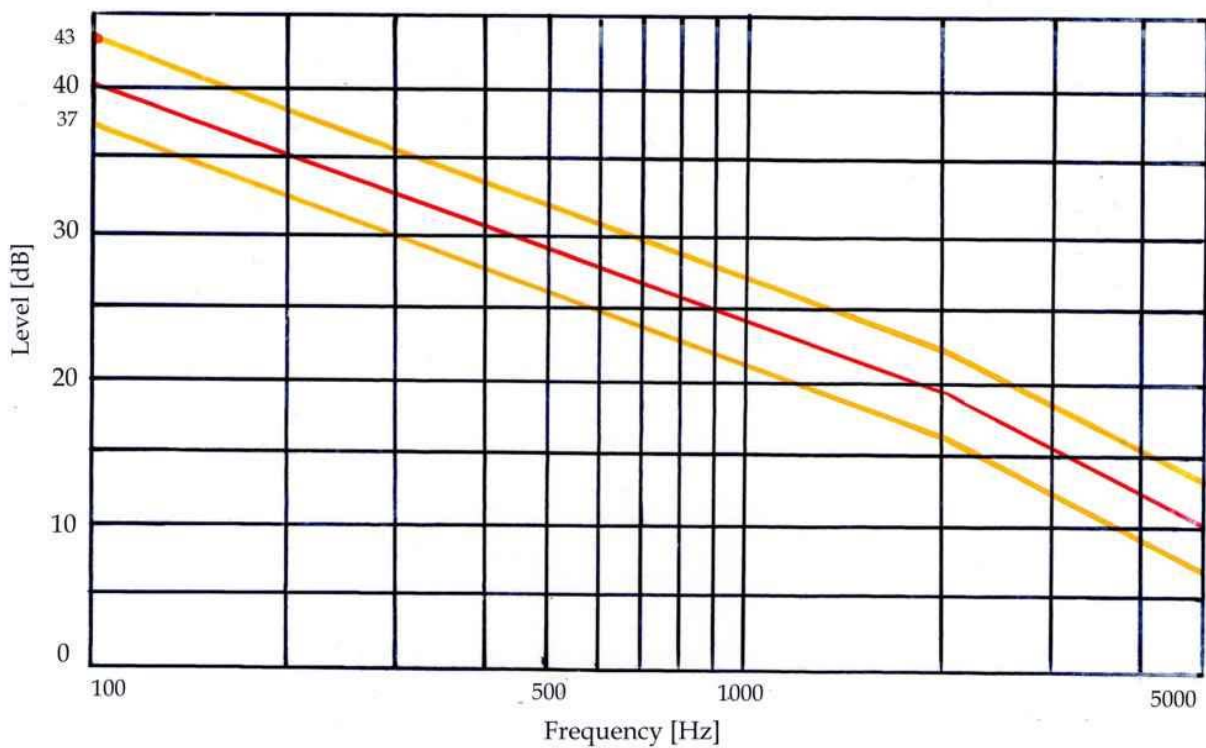


Fig. 3. The room noise power density spectrum (Hoth noise) (Polish Standard 1991, 1999).

The size of the listening group should be such that the obtained averaged test results do not change as the group size is further increased (minimum 5 persons). The group of listeners who are to take part in logatom intelligibility measurements should be trained (2-3 training sessions are recommended). Logatons should be spoken clearly and equally loudly without accenting their beginnings or ends. The time interval between individual logatons should allow the listener to record the received logatom at leisure. It is recommended that logatons should be spoken with 3-5 sec. pauses in between. The time interval between sessions should not be shorter than 24 h and not longer than 3 days. The total duration of a session should not exceed 3 hours (including 10 minute breaks after each 20 minute listening period).

Listeners write the received logatons on a special form on which also the date of the test, the test list number, the speaker's name or symbol (no.), the listener's name and additional information which the measurement manager may need from the listener is noted. The recording should be legible to prevent a wrong interpretation of the logatom. The received logatons may be written in phonetic transcription (a group of specially trained listeners is needed for this) or in an orthographic form specific for a given language. In the next step, the group of experts checks the correctness of received logatons and the average logatom intelligibility is calculated in accordance to the equation (3) and (4)

$$W_L = \frac{1}{N \cdot K} \sum_{n=1}^N \sum_{k=1}^K W_{n,k} [\%] \quad (3)$$

$N$  - number of listeners,  $K$  - number of test lists,  $W_{n,k}$  - logatom intelligibility for  $n$ -th listener and  $k$ -th logatom list,

$$W_{n,k} = \frac{P_{n,k}}{T_k} \cdot 100 [\%] \quad (4)$$

$P_{n,k}$  - number of correctly received logatons from  $k$ -th logatom list by  $n$ -th listener,  $T_k$  - number of logatons in  $k$ -th logatom list.

Standard deviation  $s$ , calculated in accordance to Eq.(3), expresses the distribution of logatom intelligibility values  $W_L$  over listeners.

$$s = \left[ \frac{1}{N \cdot K - 1} \sum_{n=1}^N \sum_{k=1}^K (W_{n,k} - W_L)^2 \right]^{1/2} \quad (5)$$

If  $|W_{n,k} - W_L| > 3s$ , the result of measurement is not taken into account, when an average intelligibility is calculated and calculation of  $W_L$  and  $s$  must be done in accordance to Eq. (1) and (2) for reduced number of measurements.

The obtained average logatom intelligibility value can be used to determine quality classes according to Table 1 (Polish Standard 1991).

Quality class	Description of quality class	Logatom intelligibility [%]
I	Understanding transmitted speech without slightest concentration of attention and without subjectively detectable distortions of speech signal	above 75
II	Understanding transmitted speech without difficulty but with subjectively detectable distortions of speech	60 ÷ 75
III	Understanding transmitted speech with concentration of attention but without repetitions and return queries	48 ÷ 60
IV	Understanding transmitted speech with great concentration of attention and with repetitions and return queries	25 ÷ 48
V	It is impossible to fully understand transmitted speech (breakdown of communication)	to 25
For each quality class lowest logatom articulation values are lowest admissible values		

Table 1. Speech intelligibility quality classes for analog channels in the traditional logatom intelligibility method.

3. Modified intelligibility test with forced choice (MIT-FC)

In the traditional intelligibility tests the listeners write down (in ortographic form) received utterances on a sheet of paper and next a professional team revises the results and calculates the average intelligibility. This is the most time-consuming and difficult operation. To eliminate "hand-made " revision of the tests a method, called "*modified intelligibility test with forced choice*" (MIT-FC) has been designed and investigated in the Institute of Telecommunications, Teleinformatics and Acoustics at the Wroclaw University of Technology .

In the MIT-FC method all experiments are controlled by a computer. The automation of the subjective measurement is connected with the basic change in generation of logatoms and in making decision by a listener. The computer generates logatoms and presents the utterances (for logatom test the list consists of 100 phonetically balanced nonsense words), via a D/A converter and loudspeaker to the listeners subsequently and for each spoken utterance several logatoms that have been previously selected as perceptually similar are visually presented.



It has been found (Brachmanski, 1995) that the optimal number of logatoms presented visually to the listeners is seven (six alternative logatoms and one transmitted logatom to be recognized). The listener chooses one logatom from the list visually presented on the computer monitor. The computer counts the correct answers and calculates the average logatom intelligibility and standard deviation. The measurement time for one logatom set (3 lists) consisted of 300 logatoms is 20 minutes.

All measurement procedures are fully automatized and an operator has a flexible possibilities to set the measurement parameters and options. It is also possible to upgrade the application which realizes the MIT-FC method with more sophisticated scores processing. Block diagram system for the subjective measurements of logatom intelligibility by MIT-FC method in the rooms is presented in Fig.4.

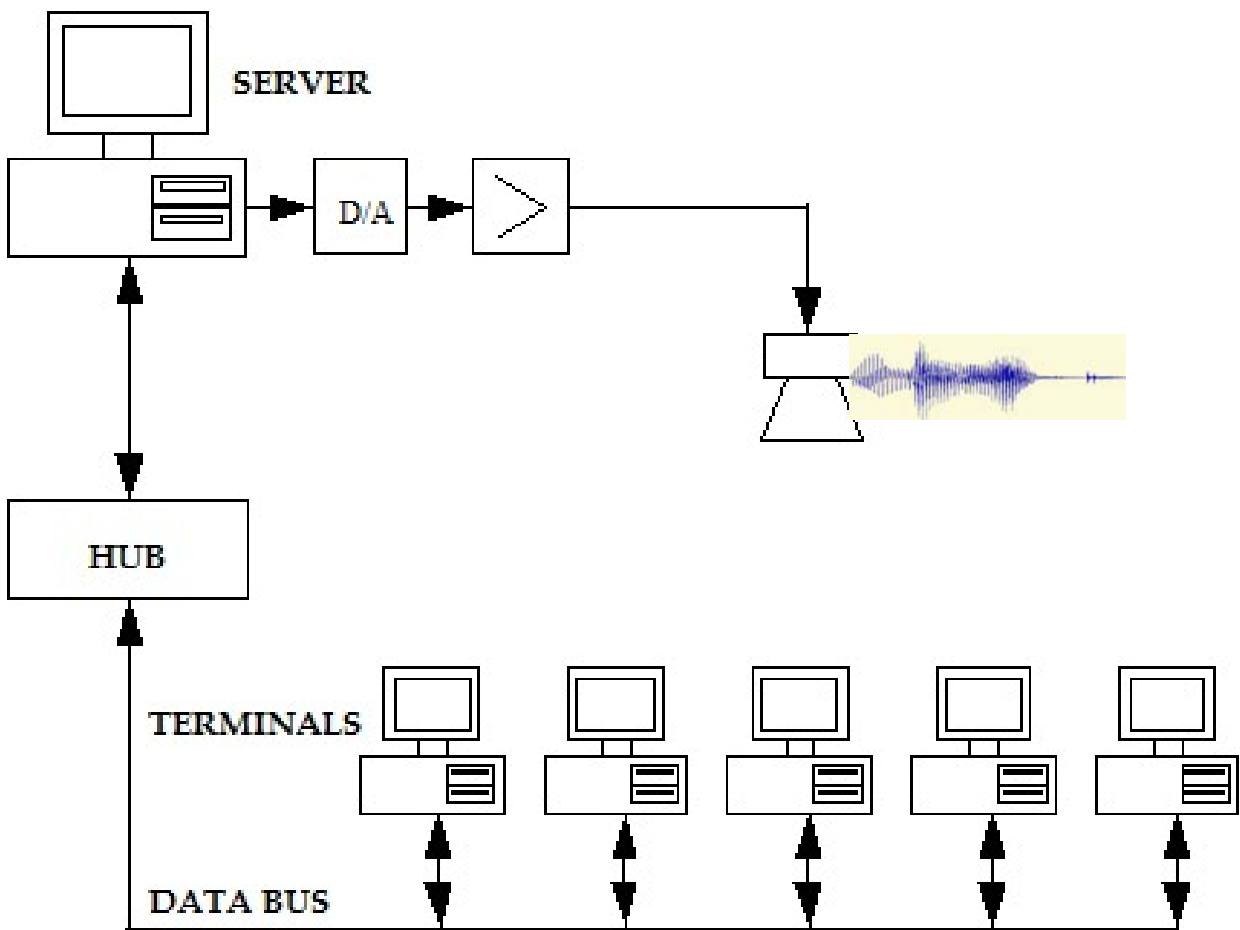


Fig. 4. The measuring system for the assessment of logatom intelligibility in room.

The obtained with MIT-FC method average logatom intelligibility value can be used to determine quality classes according to Table 2.

Quality class	Description of quality class	Logatom intelligibility [%]
I	Understanding transmitted speech without slightest concentration of attention and without subjectively detectable distortions of speech signal	above 70
II	Understanding transmitted speech without difficulty but with subjectively detectable distortions of speech	60 ÷ 70
III	Understanding transmitted speech with concentration of attention but without repetitions and return queries	54 ÷ 60
IV	Understanding transmitted speech with great concentration of attention and with repetitions and return queries	40 ÷ 54
V	It is impossible to fully understand transmitted speech (breakdown of communication)	to 40
For each quality class lowest logatom articulation values are lowest admissible values		

Table 2. Classes of speech intelligibility quality for analog channels for the MIT-FC method.

4. MIT-FC measurement system

The program for the subjective assessment of speech transmission in rooms with logatom intelligibility method with forced choice (MIT-FC) is based on TCP Client/Server technology i.e. the communication is done by local network. Requirements of the program are following: PC computer with Windows 9x, a network card and hub for communication between the Server and Clients (members of the team of listeners).

The work with the program starts with the installation on the Server computer a Server program. The Server is supervised by the person leading the subjective assessment. The next step is the installation of the Client program on the Client (listener) computers. The Client computers are used by members of the team of listeners. Before starting the assessment the Server and Client programs should be configured. During the configuration of the Server program it is necessary to give the path to the directory with signal files (testing signals - logatoms), number of logatoms per a session, intervals between reproduced logatoms, number of sessions and the port for the communication with the Client (usually 3000) (Fig.5).

The configuration of the Client program is done by giving the name of the measure point (e.g. a room, location of listener in the room etc.), listeners login, IP address and the port number (usually: 3000) (Fig.6).

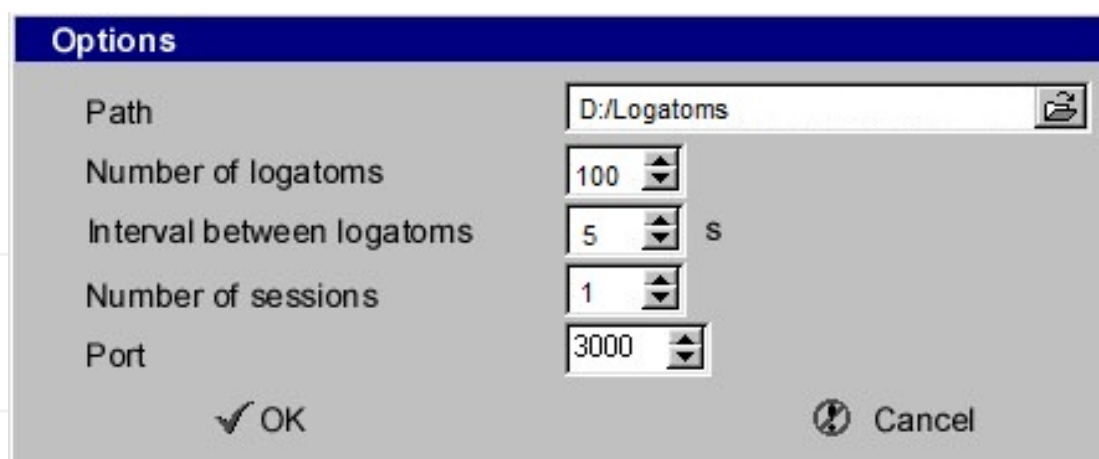


Fig. 5. The example of the window of the Server program

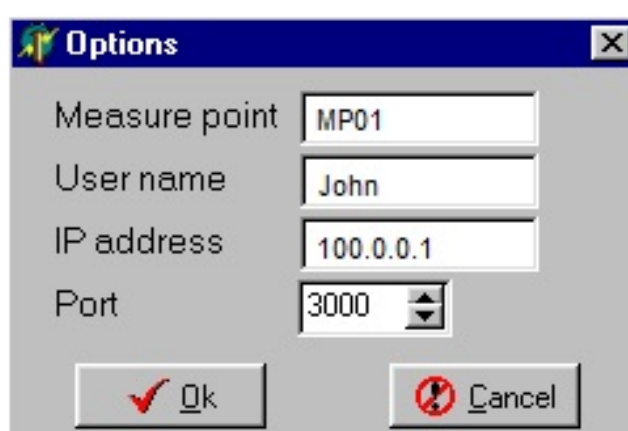


Fig. 6. The example of the window of the Client program

The next step after the configuration is the connection process. The number of people being logged on can be seen on the right-hand side of the main window of the program. During a multi-session assessment (the number of session should be chosen during the configuration of the Server), after finishing of the first session the program waits for reconfiguration of measurement positions. For example, changing the listener on certain measurement position, we should first disconnect the Client and change the user name. After this and choosing the Continue option, the next session can be started. The computer generates logatoms and for each spoken utterance visually shows six alternative logatoms and one transmitted logatom to be recognized (Fig.7a). The listener chooses one logatom from the list visually presented on the computer monitor (Fig. 7b). During the tests, the listener is confirming his response by using key from '1' to '7'. Other keys are non-active during all testing session.

After finishing all measurement sessions, the dialog window presenting results in two options shows up:

1. Result of session nr - in this option the number of session for which the results will be shown should be given.
2. Summary - in this option the summary of all sessions with detailed list of listeners and measurement points shows up.

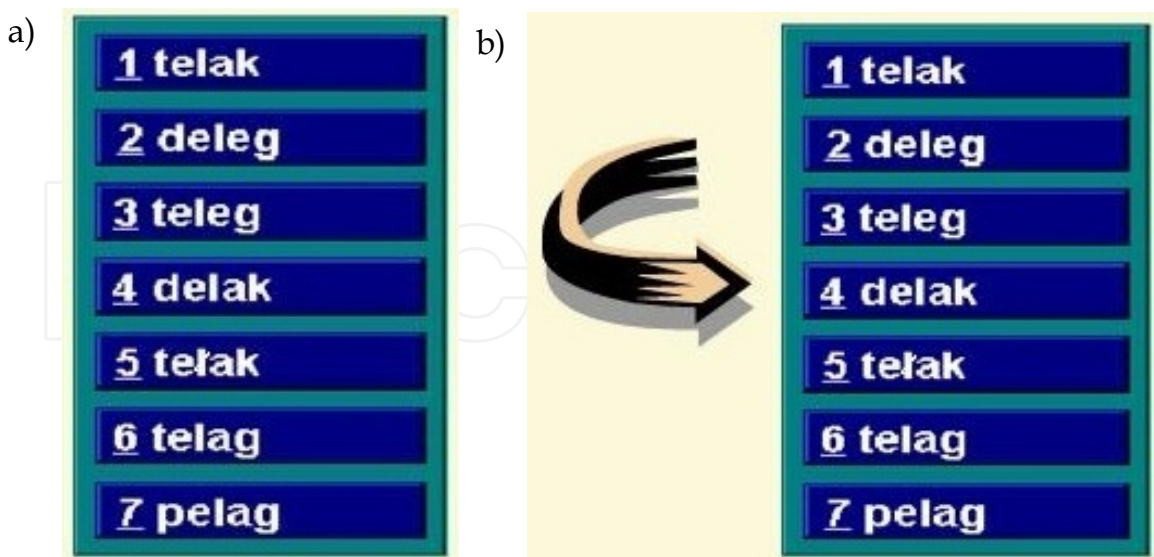


Fig. 7. The example of the listener's window.

## 5. Experiments

The goals of experiment

- decision if the results of traditional and modified with forced choice methods let finding the relation which would allow to convert results from one method to the other and the classification of rooms tested with both methods,
- measurement of experimental relations between traditional and modified logatom intelligibility methods.

Taking into account the comparative character of the experiment it was planned to be done only in a function of used logatom intelligibility method. With this end in view each measurement was done with both traditional and modified methods, not changing:

- listeners,
- surroundings.
- measurement system (only the logatom lists),

The subjective tests were done according to Polish Standard PN-90/T-05100 – with the team of listeners made up of 12 listeners in age from 18 to 25 years. The listening team was selected from students at Wroclaw University of Technology with normal hearing. The qualification was based on audiometric tests of hearing threshold. The measurements of logatom intelligibility were done using the traditional method and the MIT-FC method. The measurements were taken in two unoccupied rooms (Fig. 8). In each room, four measure point (Mp) were selected. These positions were chosen in the expectation of yielding a wide range of logatom intelligibility. Sound sources (voice and white or rose noise) were positioned in the part of the room normally used for speaking. One loudspeaker was the voice source and the second – the noise source. The various conditions were obtained by combination 14 level of white and rose noise and four measure point. The 14 signal-to-noise ratios (SNR) were used: 39 (without noise, only background noise), 36, 33, 30, 27, 24, 21, 18, 15, 12, 9, 6, 3, 0dB. As a result

112 different transmission conditions were obtained (14 SNR\*4Mp\*2rooms). The speech and noise signal levels were controlled by means of a 2606 Bruel & Kjaer instrument by measuring them on a logarithmic scale according to correction curve A.

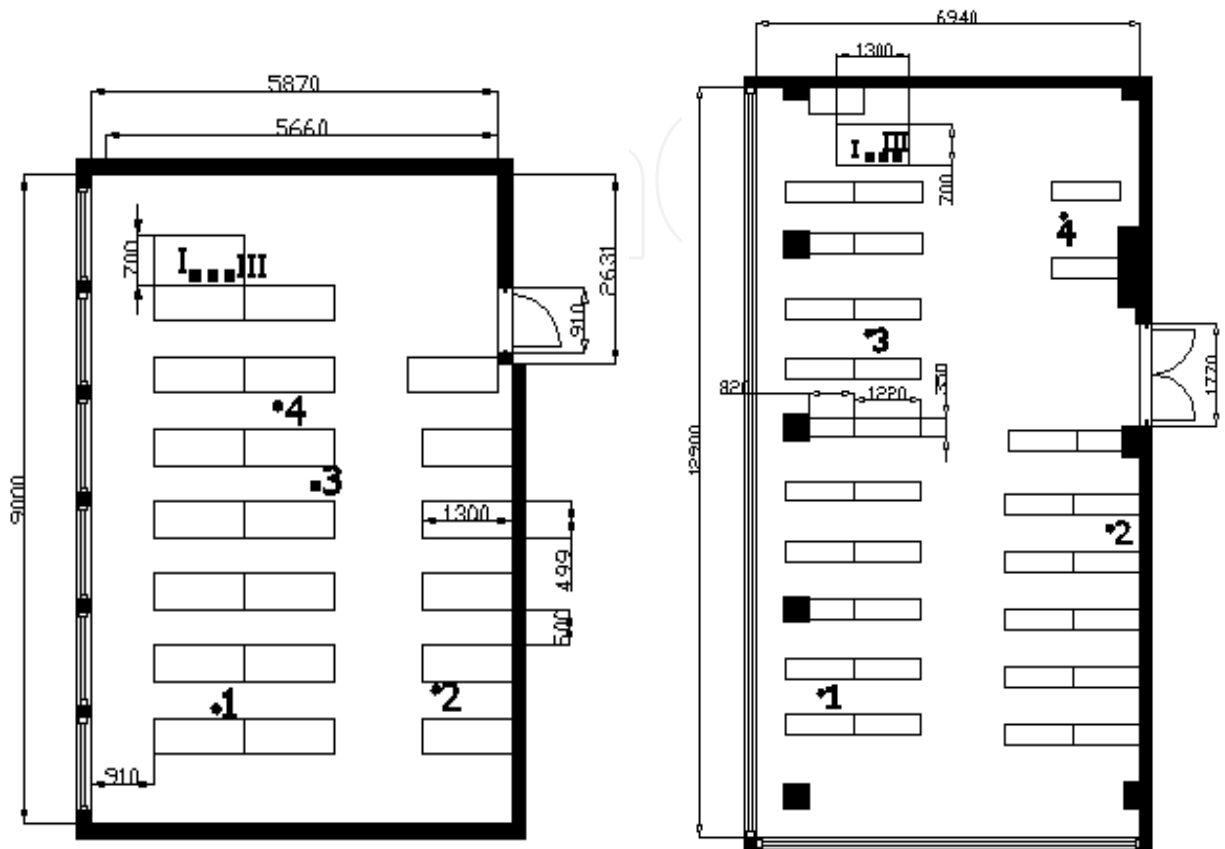


Fig. 8. Plan view of the rooms 1 and 2 showing source position and four receiver positions (I – loudspeaker – source of the logatons, III - loudspeaker – source of the noise, 1, 2, 3, 4 – measurement points).

The testing material consisted of phonetically and structurally balanced logatons and sentences lists uttered by professional male speaker, whose native language was Polish. Logatom lists reproduced through the loudspeaker were recorded on the digital tape recorder in an anechoic chamber using a linear omnidirectional microphone. The microphone was positioned 200mm from the speaker’s lips. The active speech level was controlled during recording with a meter conforming to Recommendation P.56 (ITU-T, 1993). At the beginning of each logatom set recording, 20 seconds 1000Hz calibration tone and 30 seconds rose noise are inserted at a level equal to the mean active speech level.

For each measure point (Mp) (the place where the measure position was situated) a list of 300 logatons has been prepared. The same logatom lists were never played for any condition day after day. The logatom lists at the four listener locations were recorded on the digital tape recorder. These recordings were played back over headphones to the subject afterward. This way of subjective measurements realization provides the same listening conditions for both traditional and with choice methods. In each room for each position of listener (Mp) and for each signal-to-noise ratio (SNR) the logatom intelligibility was obtained by averaging out the group of listeners results.

The listening tests were done in the studio of Institute of Telecommunications, Teleinformatics and Acoustics of Wroclaw University of Technology (Fig.9). Background noise level didn't exceed 40 dBA. Subjective measurements of logatom intelligibility were taken in conditions of binaural listening using headphones for the optimum speech signal level of 80 dBA.

Prior to the proper measurements the listening team was subjected to a 6 - hour training (two 3 - h sessions). The measurement sessions duration did not exceed 3h (together with 10 min breaks after every 20 min of listening).



Fig. 9. Speech quality subjective measurement stand.

The subjective logatom intelligibility measurement results, obtained for different speech to noise ratio, are presented graphically in fig. 10. The curves, representing the relationship between logatom intelligibility and the signal-to-noise ratio in a room were approximated by a four-degree polynomial calculated on the basis of the least-squares method. The obtained relations are presented in fig. 10. which also includes values of correlation coefficient  $R^2$  - a measure of the conformity between the polynomial and the results obtained from the subjective tests. As one can see there is very good agreement between the theoretical curve and the empirical results; the value of correlation coefficient  $R^2$  exceeds 0.99 in each case.



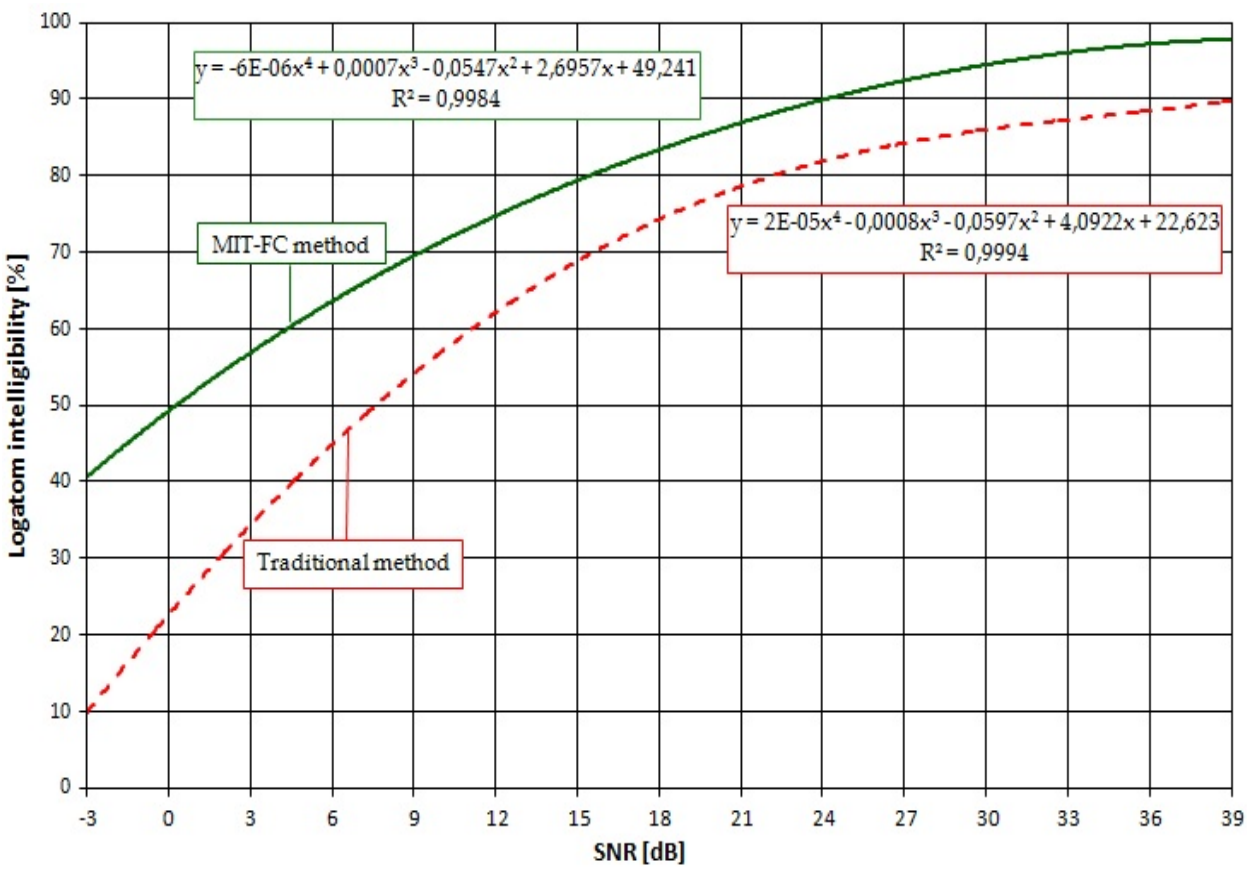


Fig. 10. Relationship between logatom intelligibility and signal-to-noise ratio (SNR) for rooms (Logatom intelligibility measured with traditional and MIT-FC method).

For a few randomly selected measuring points the distribution of  $W_{n,k}$  values was compared with the normal distribution. The agreement between the  $W_{n,k}$  distribution and the normal distribution were tested by applying the Kolmogorov-Smirnov test. It has been found that at significance level  $\alpha = 0.05$  there are no grounds to reject the hypothesis about the goodness of fit of the distributions. Thus, it is reasonable to use average logatom hypothesis  $W_L$  as an estimator of the logatom intelligibility for a given measuring point.

The main goal of presented research was assessment if there exists a relation between measurement results of traditional method and modified intelligibility test with forced choice (MIT-FC) in rooms, and if such a relation exists, its finding out. The obtained results revealed that there exists monotonic relation between results of traditional method and MIT-FC. The results were presented on the surface: logatom intelligibility MIT-FC – traditional, and approximated by a fourth order polynomial. The obtained relations are presented in fig. 11. which also includes values of correlation coefficient  $R^2$  – a measure of the conformity between the polynomial and the results obtained from the subjective tests.

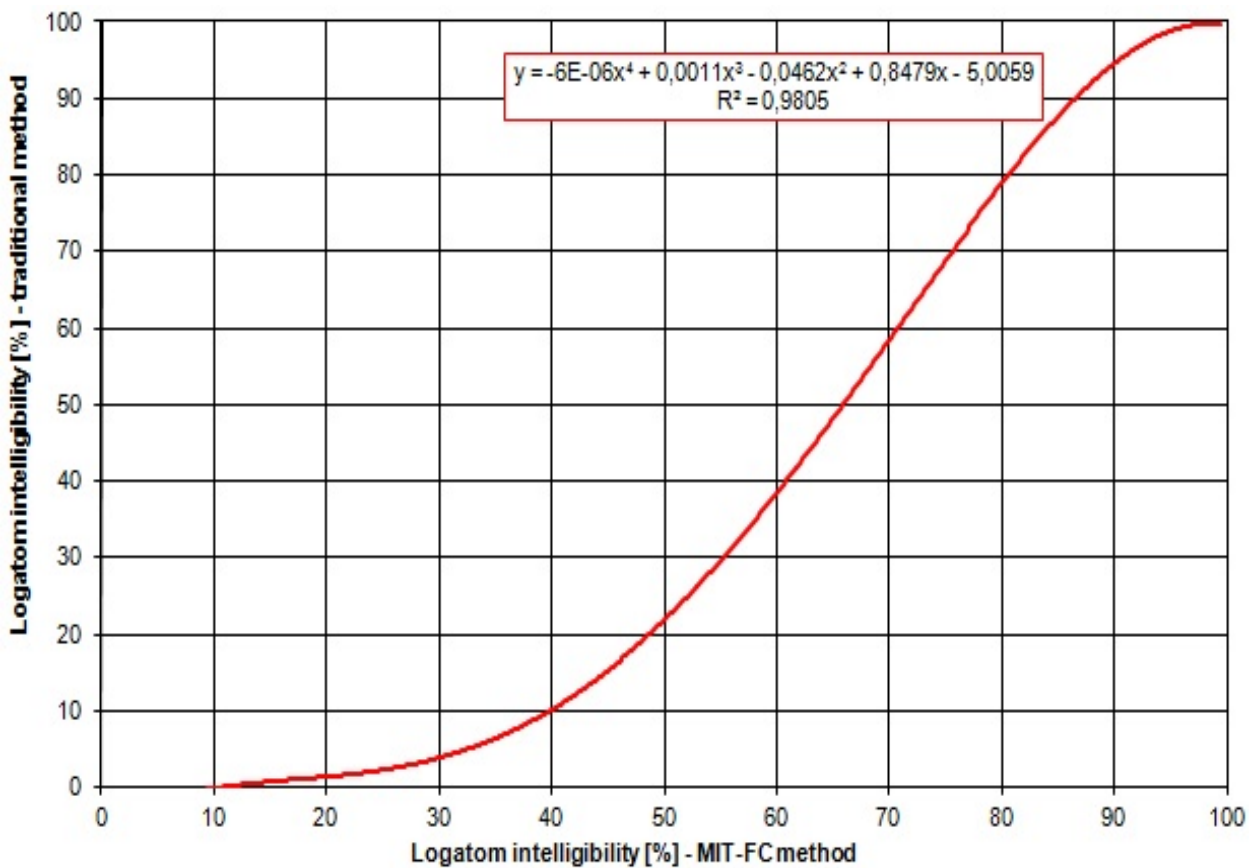


Fig. 11. Relationship between logatom intelligibility measured with traditional and MIT-FC method for rooms.

6. Conclusion

The presented MIT-FC method offers a simple, easy to use, stable, and fully automatized speech system to assessment of speech quality in rooms. The results of the experiments have shown that the MIT-FC method is very useful in the evaluation of speech quality in rooms. The time needed to carry out the measurement with MIT-FC method is the same as in traditional one but we obtain the results right after finishing the measurement process.

The experiments carried out in finding the relations between logatom intelligibility measured with traditional and semi-automatic with forced choice methods for the rooms have shown that there exist the multi-value and repetitive relation between them. It allows using both methods interchangeably and converting results between them.

The obtained relations are applied in the Institute of Telecommunications, Teleinformatics and Acoustics of Wrocław University of Technology to the design of subjective tests for the verification of results yielded by a new objective method based on automatic speech recognition techniques.

## 7. References

- ANSI S 3.2, (2009), *Methods for Measuring the Intelligibility of Speech over Communication Systems*, American National Standards Institute.
- ANSI S 3.5, (1997), *Methods for the Calculation of the Speech Intelligibility index (SII)*. American National Standards Institute
- Basciuk K., Brachmanski S., (1997), The Automation of the Subjective Measurements of Logatom Intelligibility, Prep. 4407, 102-nd Convention AES, Munich, Germany, March 22-25, 1997.
- Brachmanski S., (1982), *Modulation Transfer Function (MTF) as a Measure of Polish Speech Transmission Quality* (in Polish), Ph. D. Thesis, Wrocław.
- Brachmanski S., (1995), Choosing Optimum Number of Test Items in Subjective Logatom Measurements (in Polish). *Proc. XLII Open Seminar on Acoustics*, pp. 423-428, ISBN 83-902146-3-6, Warszawa-Bialowieza, September 12-15, 1995
- Brachmanski S., (2002) The Automation of Subjective Measurements of Speech Intelligibility in Rooms, 112<sup>th</sup> Conv. AES, Munich, Germany, May 10-13, 2002.
- Brachmanski S., (2004) Estimation of Logatom Intelligibility with the STI Method for Polish Speech Transmitted via Communication Channels, *Archives of Acoustics*, Vol. 29, No. 4, (2004), pp. 555-562, , ISSN 0137-5075.
- Brachmanski S., (2004), The Subjective Measurements of Speech Quality in Rooms, *Proc. of Subjective and Objective Assessment of Sound*, Poznan, September 1-3, 2004.
- Brachmanski S., (2006), Experimental Comparison between Speech Transmission Index (STI) and Mean Opinion Scores (MOS) in Rooms,. *Archives of Acoustics*, Vol .31, No.4, (2006), pp. 171-176, ISSN 0137-5075.
- Davies D.D., Davies C., (1989), Application of Speech Intelligibility to Sound Reinforcement. *J. Audio Eng. Soc.*, Vol. 37, No.12, (December 1989), pp. 1002-1018.
- Farina A., (2001), Acoustic Quality of Theatres: Correlations between Experimental Measures and Subjective Evaluations, *Applied Acoustic*, Vol. 62, No 8, (August 2001), pp. 889-916, ISSN: 0003682X.
- French, N.R., Steinberg, J.C., (1977), Factors Governing the Intelligibility of Speech Sounds, , In: *Speech Intelligibility and Speaker Recognition*, Hawley M. E., pp. 128 – 152, Dowden, Hutchinson & Ross Inc., ISBN 0-470-99303-0, Stroudsburg, Pennsylvania.
- Houtgast T., Steeneken H.J.M., (1973), The Modulation Transfer Function in Room Acoustics as a Predictor of Speech Intelligibility, *J. Acoust. Soc. Am.* Vol. 54, No. 2, (August 1973), pp. 557-557, pp. 66-73, ISSN 0001-4966
- Howard D.M, Angus J.A.S, *Acoustics and Psychoacoustics*, Elsevier-Focal Press, 2009, ISBN 978-0-240-52175-6, Oxford, UK.
- IEC 60268-16, (2003), *Sound system equipment – Part16: Objective Rating of Speech Intelligibility by Speech Transmission Index*, International Electrotechnical Commission, Geneva, Switzerland.
- ISO/TR 4870, (1991), *Acoustics – The Construction and Calibration of Speech Intelligibility Tests*. International Organization for Standardization.
- ITU-T Recommendation P.56, (1993), *Objective Measurement of Active Speech Level*, International Telecommunication Union, Geneva, Switzerland.

- ITU-T Recommendation P.800, (1996), *Method for Subjective Determination of Transmission Quality*, International Telecommunication Union, Geneva, Switzerland.
- ITU-T Recommendation P.830, (1996), *Method for Objective and Subjective Assessment of Quality*, International Telecommunication Union, Geneva, Switzerland.
- ITU-T Recommendation P.862, (2003), *Perceptual Evaluation of Speech Quality (PESQ), an Objective Method for End-To-End Speech Quality Assessment of Narrowband Telephone Networks and Speech Codecs*, International Telecommunication Union, Geneva, Switzerland.
- ITU-T Recommendation P.863, (2011), *Methods for Objective and Subjective Assessment of Speech Quality. Perceptual Objective Listening Quality Assessment*, International Telecommunication Union, Geneva, Switzerland.
- ITU-R Recom. BS.1116-1, (1997), *Method for the Subjective Assessment of Small Impairments in Audio Systems Including Multichannel Sound Systems*, International Telecommunication Union, Geneva, Switzerland.
- Kryter, K.D., (1962), Methods for the Calculation and Use of the Articulation Index, *J. Acoust. Soc. Am.*, Vol. 34, No. 11, (November 1962), pp. 1689-1697, ISSN 0001-4966.
- Lam P., Hongisto V., (2006), Experimental Comparison between Speech Transmission Index, Rapid Speech Transmission Index, and Speech Intelligibility Index, *J. Acoust. Soc. Am.*, Vol. 119, No. 2, (February 2006), pp.1106-1117, ISSN 0001-4966.
- Majewski W., Basztura Cz., Myślecki W., (1988), Relation between Speech Intelligibility and Subjective Scale of Speech Transmission Quality., *Proc. 7<sup>th</sup> FASE Symposium, Proceedings SPEECH'88*, 719-726, Edinburgh, August 22-26, 1988.
- Majewski W., Myślecki W., Baściuk K., Brachmański S., (1998), Application of Modified Logatom Intelligibility Test in Telecommunications, Audiometry and Room Acoustics, *Proceedings 9<sup>th</sup> Mediterranean Electrotechnical Conference Melecon'98*, pp. 25-28, Tel-Aviv, Israel, May 18-20, 1998.
- Majewski W., Myślecki W., Brachmański S., (2000), Methods of Assessing the Quality of Speech Transmission (in Polish), *Proceedings of 47<sup>th</sup> Open Seminar on Acoustics*, pp. 66-75, ISBN 83-914391-0-0, Rzeszow-Jawor, September 19-22, 2000.
- Möller S. *Assessment and Prediction of Speech Quality in Telecommunications*, Kluwer Academic Publisher, ISBN 978-1-4419-4989-9, Dordrecht, Netherlands.
- Polish Standard PN-90/T-05100, (1991), *Analog Telephone Chains. Requirements and Methods of Measuring Logatom Articulation* (in Polish), Polski Komitet Normalizacyjny (Polish Committee for Standardization), 1990, Warszawa, Poland
- Polish Standard PN-V-90001, (1999), *Digital Communication Systems. Requirements and Methods for Measurement of Logatom Articulation* (in Polish), Polski Komitet Normalizacyjny (Polish Committee for Standardization), 1999, Warszawa, Poland
- Sotschek J., (1976), Methoden zur Messung der Sprachgüte I: Verfahren zur Bestimmung der Satz- und der Wortverständlichkeit, *Der Fernmelde Ingenieur*, Vol. 30, No. 10, pp. 1-31.
- Srinivasan S.H., (2004), Speech Quality Measure Based on Auditory Scene Analysis, *Proc. IEEE 6<sup>th</sup> Workshop on Multimedia Signal Processing*, pp. 371 - 374, ISBN: 0-7803-8578-0 September 29- October 1, 2004, Siena, Italy.

- Steeneken H.J.M., Houtgast T., (1980), A Physical Method for Measuring Speech-Transmission Quality, *J. Acoust. Soc. Am.*, Vol. 67, No. 1, (January 1980), pp. 318 - 326, ISSN 0001-4966.
- Steeneken H.J.M., Houtgast T., (2002), Validation of Revised STI Method, *Speech Communication*, Vol. 38, No. 3-4, (November 2002), pp.413-425, ISSN:0167-6393.

IntechOpen

IntechOpen

© 2012 The Author(s). Licensee IntechOpen. This is an open access article distributed under the terms of the [Creative Commons Attribution 3.0 License](https://creativecommons.org/licenses/by/3.0/), which permits unrestricted use, distribution, and reproduction in any medium, provided the original work is properly cited.

IntechOpen

IntechOpen